

TOP ALTITUDE:
3000




ASOS 119.925
 CLNC DEL
 121.8 257.65
 132.075 269.075 (When Tower Closed)
 GND CON
 121.8 257.65
 MARTINSBURG TOWER *
 124.3 (CTAF) 233.7
 POTOMAC DEP CON
 128.825 239.025

NOTE: RNAV 1.
 NOTE: RADAR required.
 NOTE: DME/DME/IRU or GPS required.
 NOTE: Takeoff Rwy 8: If issued an ATC heading that requires a westbound turn, climb heading 079° to 1300 prior to turning for obstacle avoidance.
 NOTE: Takeoff Rwy 26: If issued an ATC heading that requires a right turn, climb heading 259° to 2400 prior to turning for obstacle avoidance.

TAKEOFF MINIMUMS

Rwy 8: Standard
 Rwy 26: Standard with minimum
 climb of 225' per NM to 2100.

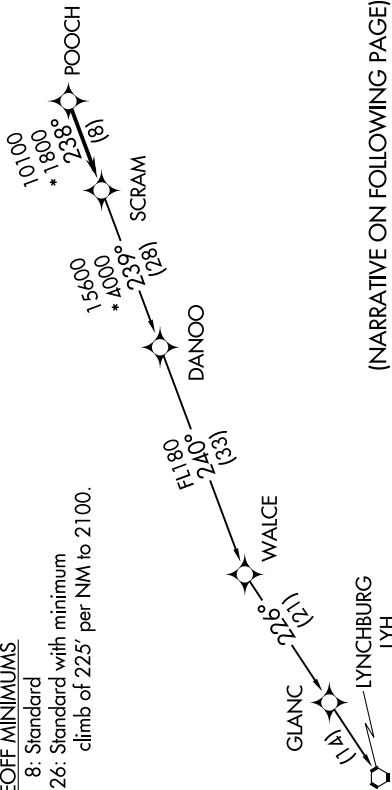

(NARRATIVE ON FOLLOWING PAGE)
 (NOTES CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.